



RoHS

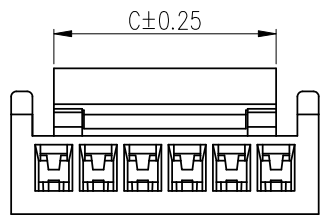

2P~6P

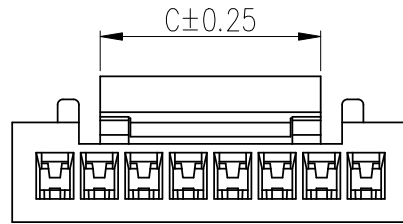

7P~15P

NOTE:

1. MATERIAL: NYLON 66 UL94 V-0

2. RoHS & HF COMPLIANCE

3. BILL OF PART NO.

1258H-XP-X-HF

→ HALOGEN FREE





→ COLOR: BLANK(NATURAL) OR A THRU Z

NO OF CIRCUITS: 2~15

4. FOR COLOR, AVAILABILITY, DELIVERY & MOQ, CONTACT CKM

5. DIMENSIONAL


POS	A	B	C
2	—	3.65	1.90
3	2.50	4.90	3.00
4	3.75	6.15	4.25
5	5.00	7.40	4.25
6	6.25	8.65	6.25
7	7.50	9.90	6.25
8	8.75	11.15	6.25
9	10.00	12.40	6.25
10	11.25	13.65	8.20
11	12.50	14.90	8.20
12	13.75	16.15	8.20
13	15.00	17.40	8.20
14	16.25	18.65	8.20
15	17.50	19.90	8.20

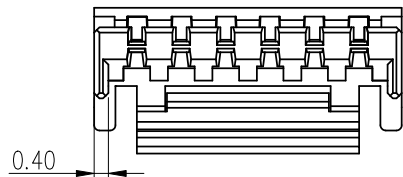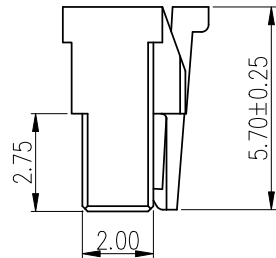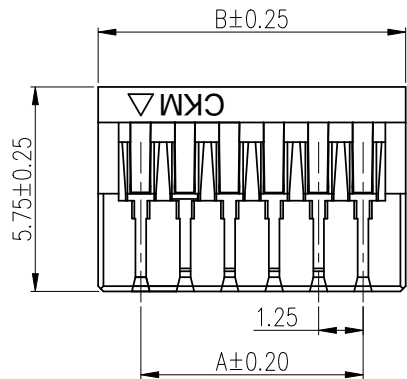



B		ADDS PACKING DIAGRAM	Rock	2017.01.05
A		NEW RELEASE	Rock	2015.12.15
REV.	ECN NO	REVISION RECORD	DRAW	DATE

TOLERANCE X. X.XXX ±0.10 X.X ±0.30 X.XX ±0.20		PART NO. 1258H-XP-X-HF		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
		DRAWING NO. C-1258H-XP-X-HF		DESCRIPTION 1258 SERIES PLUG HSG	
UNIT: mm		APPROVED BY		CHECKED BY	
DWG TYPE. Customer Drawing		DRAWN BY		PAGE 1 OF 2	
				SCALE 5 : 1	
				REV. B	

RoHS





PRODUCT

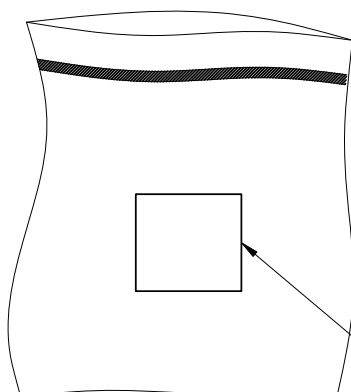


LABLE

1000PCS/BAG

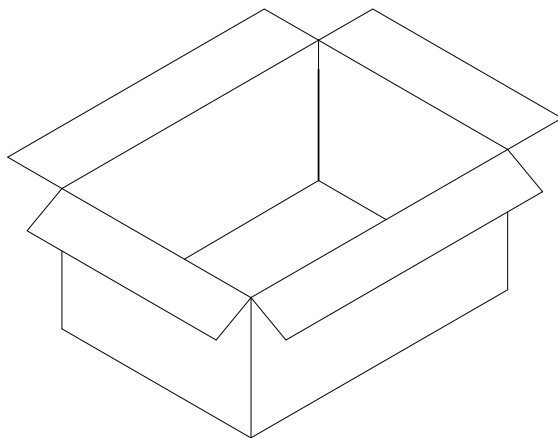

LABLE

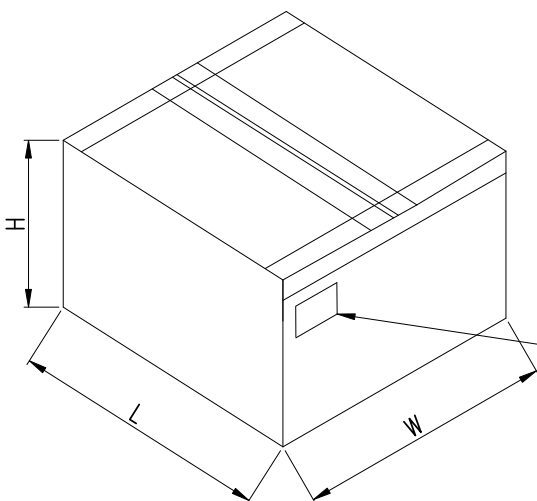

POS.	PCS/BAG	PCS/CARTON	NET WEIGHT (KG)	CROSS WEIGHT (KG)
02	1000	30000	1.23	1.68
03	1000	30000	1.50	1.95
04	1000	30000	1.83	2.28
05	1000	28000	2.02	2.47
06	1000	28000	2.32	2.77
07	1000	28000	2.55	3.00
08	1000	25000	2.50	2.95
09	1000	25000	2.73	3.18
10	1000	25000	2.95	3.40
11	1000	20000	2.54	2.99
12	1000	20000	2.72	3.17
13	1000	20000	2.90	3.35
14	1000	20000	3.04	3.69
15	1000	20000	3.20	3.85

POS	CARTON L*W*H
2~10	320*220*155mm
11~15	310*270*200mm



B		ADDS PACKING DIAGRAM	Rock	2017.01.05
A		NEW RELEASE	Rock	2015.12.15
REV.	ECN NO	REVISION RECORD	DRAW	DATE

TOLERANCE X. X.XXX ±0.10 X.X ±0.30 X.XX ±0.20 Angular ±2°		PART NO. 1258H-XP-X-HF		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
UNIT: mm		DRAWING NO. C-1258H-XP-X-HF		DESCRIPTION 1258 SERIES PLUG HSG PACKING	
DWG TYPE. Customer Drawing		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 2 OF 2 SCALE 5 : 1
					REV. B