
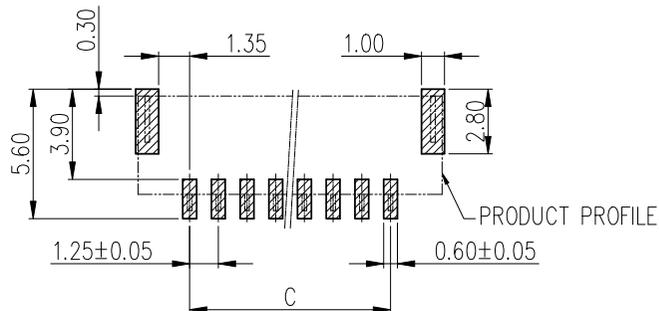


RoHS

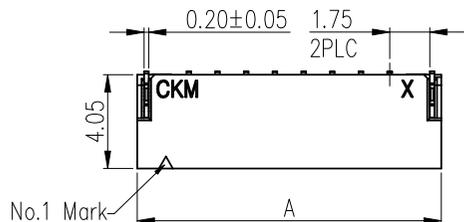

RECOMMENDED P.C.B BOARD LAYOUT
GENERAL TOLERANCE ±0.05

- NOTE:
- MATERIAL SPECIFICATION:
 - INSULATION: PA6T UL 94V-0
 - CAP: LCP UL 94V-0
 - CONTACT: THICK 0.20mm PHOSPHOR BRONZE
 - SOLDER TAB: THICK 0.20mm BRASS

- FINISH SPECIFICATION:
 - CONTACT: MATTE TIN/GOLD PLATED
 - SOLDER TAB: MATTE TIN PLATED

3. RoHS & HF COMPLIANCE

4. BILL OF PART NO:

1258WVS-XP-XX-HF

No OF CIRCUITS: 2~15




FINISH

HF=HALOGEN FREE


COLOR: BLANK(NATURAL) OR A~Z

A=MATTE TIN PLATED
C=GOLD FLASH PLATED


- FOR COLOR, AVAILABILITY, DELIVERY & MOQ, CONTACT CKM
- DIMENSIONAL

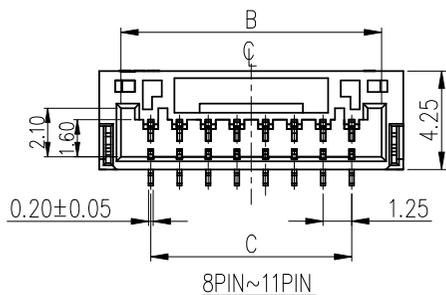

ASSEMBLY CAP
2P~5P



ASSEMBLY CAP
6P~15P




ASSEMBLY LAYOUT
TOP ENTRY TYPE

CKM


2017.04.13

研發部


POS	A	B	C
2	5.75	3.85	1.25
3	7.00	5.10	2.50
4	8.25	6.35	3.75
5	9.50	7.60	5.00
6	10.75	8.85	6.25
7	12.00	10.10	7.50
8	13.25	11.35	8.75
9	14.50	12.60	10.00
10	15.75	13.85	11.25
11	17.00	15.10	12.50
12	18.25	16.35	13.75
13	19.50	17.60	15.00
14	20.75	18.85	16.25
15	22.00	20.10	17.50

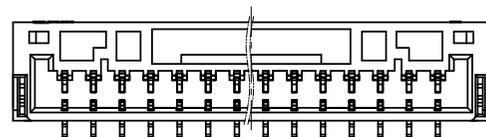

13PIN~15P



2PIN~7PIN

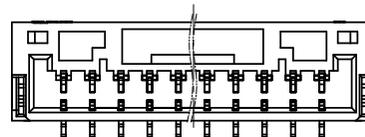

12PIN




TOLERANCE		PART NO.		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.		
X.	X.XXX ±0.10	1258WVS-XP-XX-HF				
X.X ±0.30		DRAWING NO.		DESCRIPTION		
X.XX ±0.20	Angular ±2°	C-1258WVS-XP-XX-HF				
UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
DWG TYPE.		Angus.Chen	Angus.Chen	Rock	1 OF 2	
Customer Drawing		2017.04.13	2017.04.13	2017.04.13	SCALE	
					2.5 : 1	

C		UPGRADE DRAWING	Rock	2017.04.13
B		ADDS PACKING DIAGRAM	Rock	2017.01.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS



PEELING STRENGTH: 10~130GF
PEELING SPEED: 300mm/Min

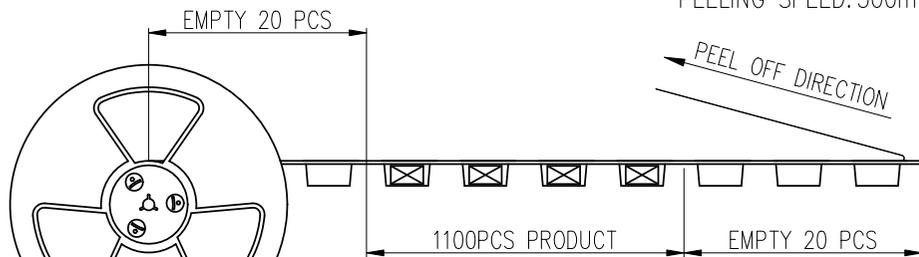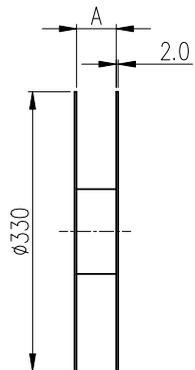

LABLE
STICK TO
THE BACK

TABLE 2:

POS	PCS/REEL	PCS/CARTON	NET WEIGHT (KG)	CROSS WEIGHT (KG)
2	1100	8800	1.19	5.20
3	1100	8800	1.35	5.36
4	1100	8800	1.50	5.51
5	1100	8800	1.76	5.77
6	1100	8800	2.15	6.16
7	1100	8800	2.40	6.41
8	1100	8800	2.58	6.59
9	1100	8800	2.79	6.80
10	1100	6600	2.20	5.85
11	1100	6600	2.36	6.01
12	1100	6600	2.49	6.14
13	1100	5500	2.20	5.82
14	1100	5500	2.32	5.94
15	1100	5500	2.46	6.08




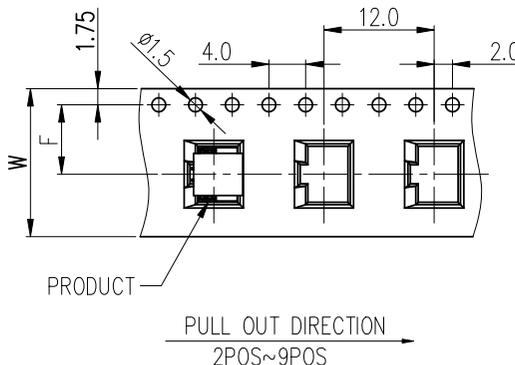


TABLE 1:

POS.	A	W	S	F	H
2~9	24.5	24.0	/	11.5	265
10~12	32.5	32.0	28.4	14.2	265
13~15	44.5	44.0	40.4	20.2	285

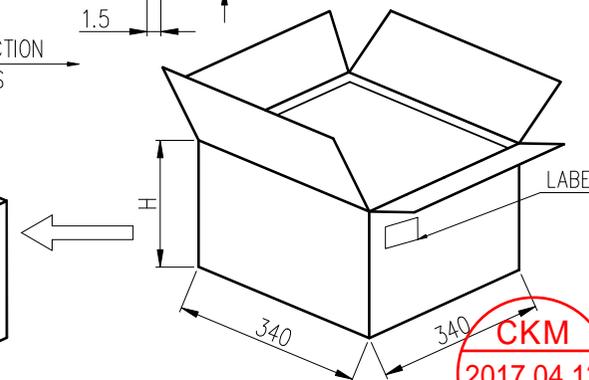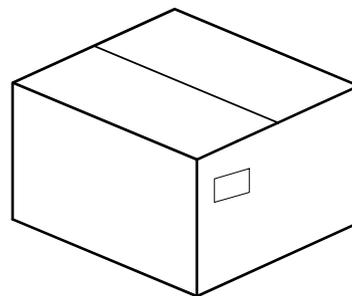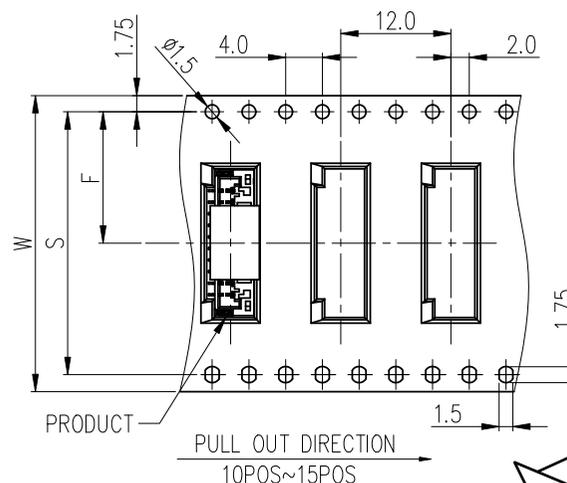

CKM
2017.04.13
研發部

TOLERANCE		PART NO.		朝貴電子股份有限公司		
X. XXX ±0.10	X.XXX ±0.10	1258WVS-XP-XX-HF		CKM ELECTRONICS CO., LTD.		
X.X ±0.30	Angular ±2°	DRAWING NO.		DESCRIPTION		
X.XX ±0.20		C-1258WVS-XP-XX-HF		1.25mm PITCH WAFER V/T SMT TYPE PACKING		
UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
DWG TYPE.		Angus.Chen	Angus.Chen	Rock	2 OF 2	C
Customer Drawing		2017.04.13	2017.04.13	2017.04.13	SCALE	
					2.5 : 1	

C	UPGRADE DRAWING	Rock	2017.04.13
B	ADDS PACKING DIAGRAM	Rock	2017.01.05
REV.	ECN NO	REVISION RECORD	DRAW DATE