


PROPOSAL RoHS

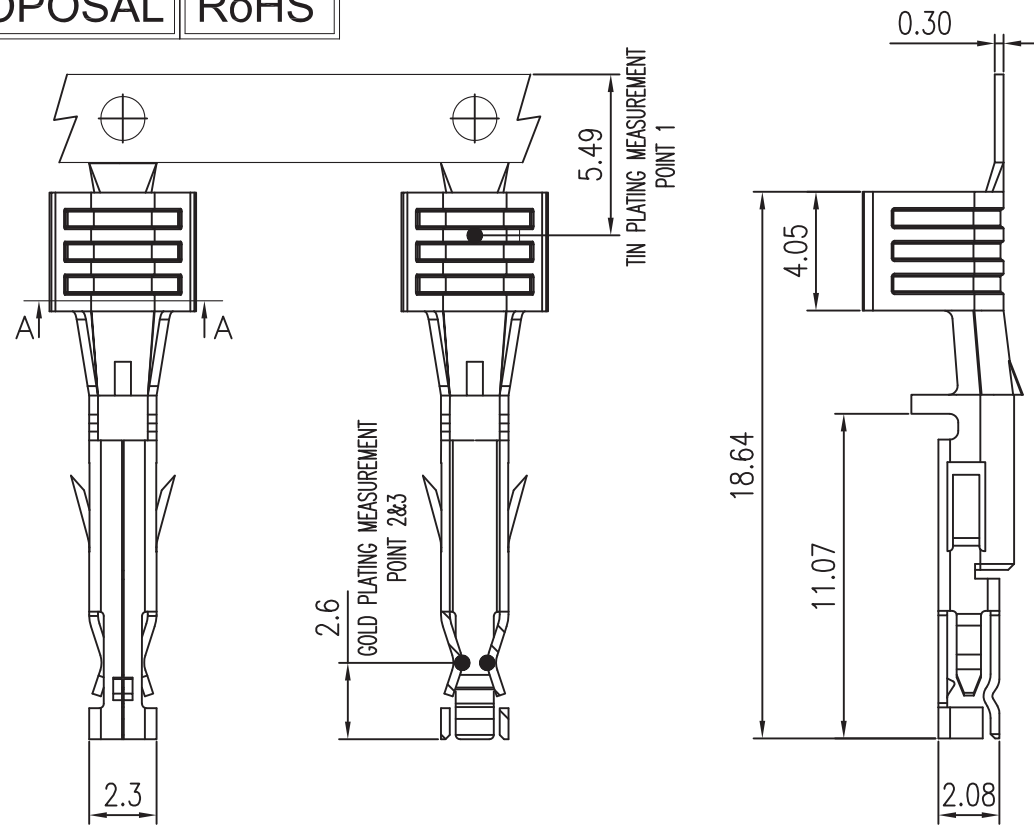


- NOTE:
- MATERIAL: HIGHT CONDUCTIVITY COPPER ALLOY
 - FINISH: TIN OR GOLD PLATING, 30u" NICKEL UNDER PLATING OVERALL
*(SELECTIVE GOLD PLATED ON CONTACT AREA)
 - PLATING MEASUREMENT: TIN: POINT 1
GOLD: POINT 2&3
NICKEL: POINT 1&2&3
 - APPLICABLE WIRES: AWG#14~16 OR #12
 - INSULATION O.D.: $\phi 4.0\sim 1.50\text{mm}$
 - RoHS COMPLIANT
 - FOR FINISH, AVAILABILITY, DELIVERY & MOQ, CONTACT CKM

5701TXH-XX I
T=TRIPLE CONTACT

STRUCTURE STATUS:
0=STANDARD(AWG#14 to #16)
2=HIGHT TAIL(AWG#12)

FINISH:
B1=TIN PLATING
C4=15u" GOLD PLATING (CONTACT AREA)
C7=30u" GOLD PLATING (CONTACT AREA)





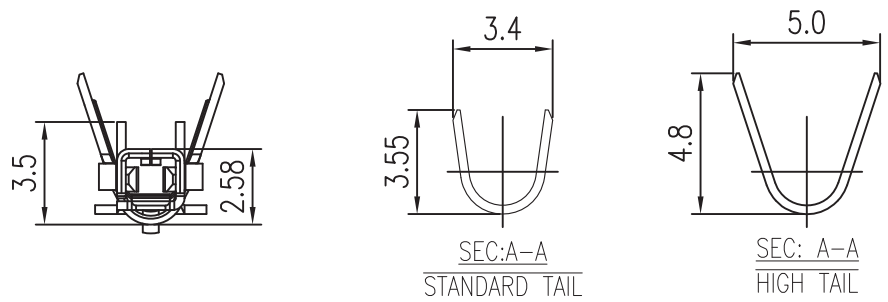


TOLERANCE		PART NO.		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
X.	X.XXX ± 0.10	5701TXH-XXT			
X.X	± 0.30	DRAWING NO.		TITLE: 5.7mm PITCH CRIMP TERMINAL	
X.XX	± 0.20	C-5701TXH-XXT			
		UNIT:		APPROVED BY	
		mm		Ivan.Su	
DWG TYPE.		CHECKED BY		DRAWN BY	
Customer Drawing		Sun.Lee		GuoXiang.Jiang	
		2022.06.20		2022.06.20	
				PAGE	
				10F2	
				SCALE	
				4 : 1	
				REV.	
				2	

2		UPDATE DRAWING	GuoXiang.Jiang	2022.06.20
1		PROPOSAL DRAWING	Secily	2022.04.19
REV.	ECN NO	REVISION RECORD	DRAW	DATE

PROPOSAL

RoHS

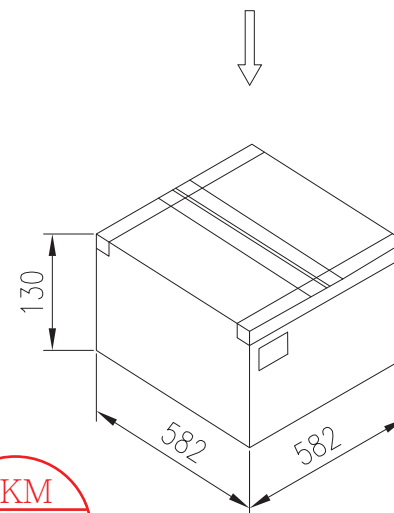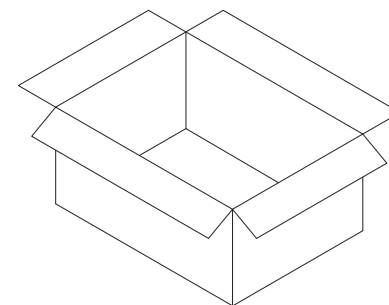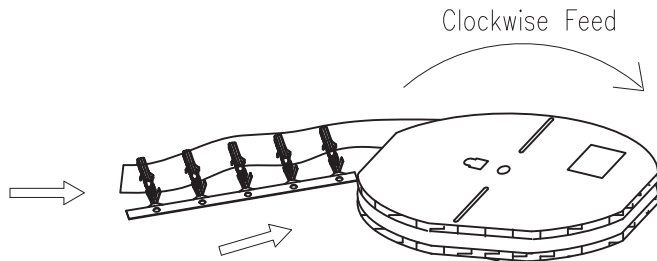

PART NO.	REEL	Carton	Weight	
	Pcs/Reel	Pcs/Carton	N/W(kg)	G/W(kg)
5701TXH-XXT	4000	12000	4.08	7.17
5701TXH-XXT	3000	9000	3.60	6.43



TOLERANCE		PART NO.		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.				
X.	X.XXX ±0.10	5071TXH-XXT						
X.X	±0.30	DRAWING NO.		TITLE: 5.7mm PITCH CRIMP TERMINAL				
X.XX	±0.20	C-5071TXH-XXT						
		UNIT:		APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
		mm		Ivan.Su	Sun.Lee	GuoXiang.Jiang	20F2	
DWG TYPE.				2022.06.20	2022.06.20	2022.06.20	SCALE	2
Customer Drawing							4 : 1	

2		UPDATE DRAWING	GuoXiang.Jiang	2022.06.20
1		PROPOSAL DRAWING	Secily	2022.04.19
REV.	ECN NO	REVISION RECORD	DRAW	DATE