

Proposal Drawing

RoHS





HF

CUST INFORMATION.

PART NO.

DRAWING NO.

REV.

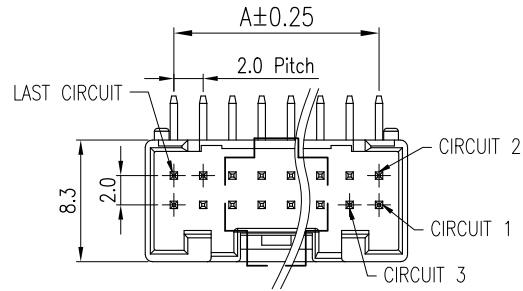CKM
2025.10.24
研發部

NOTES:

1. MATERIAL SPECIFICATION:

1.1 INSULATOR: LCP UL 94V-0

1.2 CONTACT: 0.50mm THICKNESS COPPER ALLOY

2. FINISH:

CONTACT AREA: TIN PLATING OR GOLD FLASH OVERALL.

UNDER PLATING: NICKEL PLATING OVERALL.

3. RoHS & HALOGEN FREE COMPLIANT

4. THE PRODUCT IS SUITABLE FOR THE WAVE SOLDERING PROCESS

5. BILL OF PART NO:

(PCK-)2022WR-XP-XX-XX-XX-XX-HF

No. OF CIRCUITS: 8~40

CONTACT&SOLDERING FINISH

A =MATTE TIN PLATING (OVERALL)

B =BRIGHT TIN PLATED (OVERALL)

C =GOLD FLASH(OVERALL)

COLOR: BLANK=NATURAL
OR A=BLACK

PP=TRAY PACKAGE(W/O CAP)

RP=TAPE & REEL PACKAGE(W/CAP)

SOLDER PIN LENGTH (DIM D):

BLANK=3.00mm

2.4=2.40mm

BLANK=W/BOSS (STAND OFF DIM C=0.50)

NB=W/O BOSS (STAND OFF DIM C 0.50)



01=W/BOSS (STAND OFF DIM C 0.55)

02=W/O BOSS (STAND OFF DIM C 0.55)


6. TOOLING PLEASE REFER TO THE TABLE

7. DIMENSIONAL

POS	A	B
8	6.0	10.05
10	8.0	12.05
12	10.0	14.05
14	12.0	16.05
16	14.0	18.05
18	16.0	20.05
20	18.0	22.05
22	20.0	24.05
24	22.0	26.05
26	24.0	28.05
28	26.0	30.05
30	28.0	32.05
32	30.0	34.05
34	32.0	36.05
36	34.0	38.05
38	36.0	40.05
40	38.0	42.05

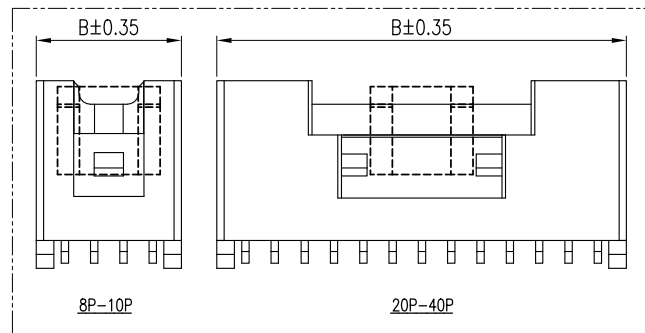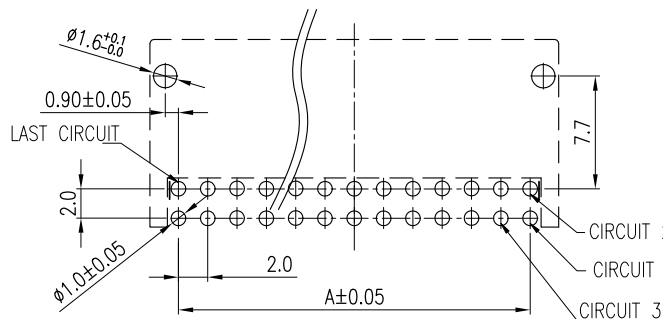RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE:±0.05

TOLERANCE

X. ±0.5 X.XXX±0.15
X.X ±0.35
X.XX ±0.25 Angular ±5°UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

2022WR-XP-XX-XX-XX-XX-HF

PCK-2022WR-XP-XX-XX-XX-XX-HF

DRAWING NO.

C-2022WR-XP-XX-XX-XX-XX-HF

APPROVED BY

Angus Chen
2025.10.24

CHECKED BY

Sun.lee
2025.10.24

DRAWN BY

Angel.tong
2025.10.24

PAGE

1 OF 3

SCALE

2: 1




REV.

A1


朝貴電子股份有限公司
CKM ELECTRONICS CO., LTD.

TITLE.

2.0mm PITCH RIGHT ANGLE TYPE

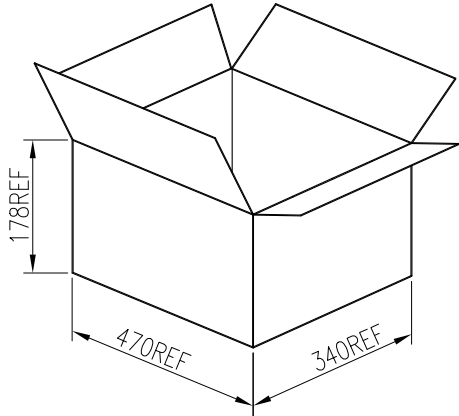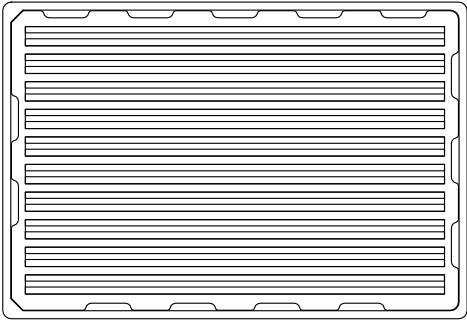

(20 INSIDE CARTON)

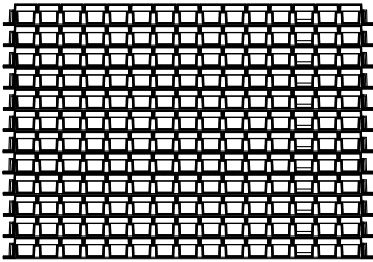

POS	PCS/TRAY	PCS/CARTON
8	300	6000
10	250	5000
12	210	4200
14	180	3600
16	160	3200
18	140	2800
20	130	2600
22	120	2400
24	110	2200
26	100	2000
28	90	1800
30	90	1800
32	80	1600
34	80	1600
36	70	1400
38	70	1400
40	70	1400

A1		PROPOSAL DRAWING	Angel.tong	2025.10.24
A		NEW DRAWING	Shawn	2025.05.09
REV.	ECN NO	REVISION RECORD	DRAW	DATE

TOLERANCE	
X. ±0.5	X.XXX±0.15
X.X ±0.35	
X.XX ±0.25	Angular ±5°
UNIT: mm	
DWG TYPE. Customer Drawing	

PART NO. 2022WR-XP-XX-XX-XX-XX-HF PCK-2022WR-XP-XX-XX-XX-XX-HF		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
DRAWING NO. C-2022WR-XP-XX-XX-XX-XX-HF		TITLE. 2.0mm PITCH RIGHT ANGLE TYPE	
APPROVED BY Angus Chen 2025.10.24	CHECKED BY Sun.lee 2025.10.24	DRAWN BY Angel.tong 2025.10.24	PAGE 2 OF 3 SCALE 2: 1
			REV. A1



Proposal Drawing

RoHS







HF

CUST INFORMATION.

PART NO. DRAWING NO. REV.

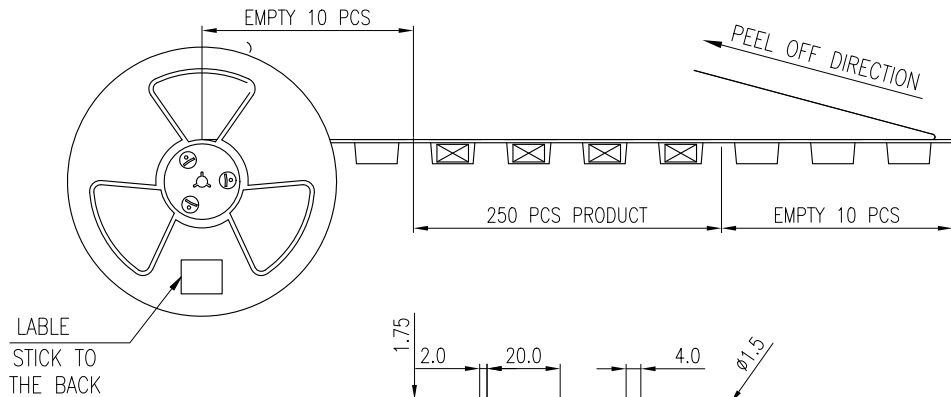

CKM
2025.10.24
研發部

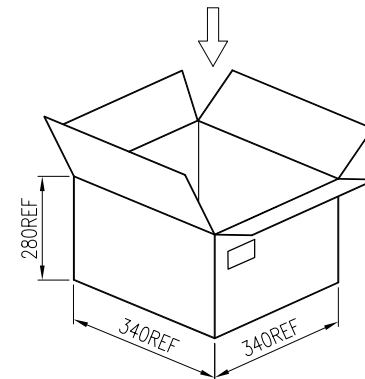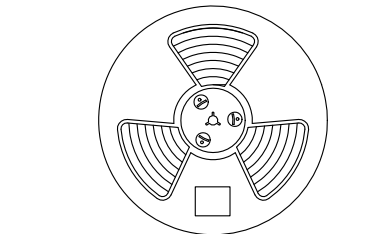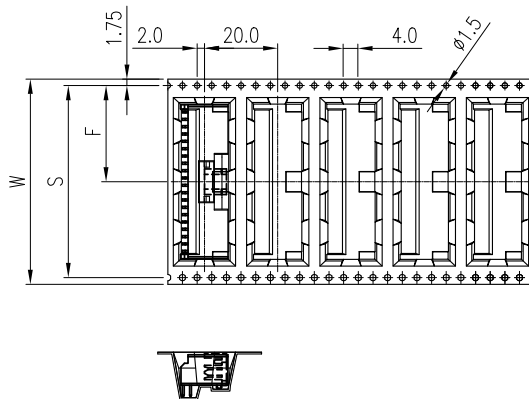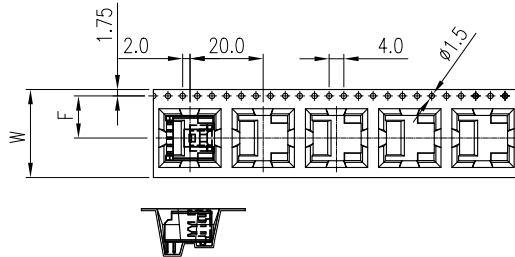

POS	W	S	F	PCS/REEL	PCS/CARTON
8	24.0		11.5	250	2000
10					
12					
14	32.0	28.4	14.2		1500
16	44.0	40.4	20.2		1250
18					
20					
22					
24					
26	56.0	52.4	26.2		1000
28					
30					
32					
34					
36					
38					
40					

A1		PROPOSAL DRAWING	Angel.tong	2025.10.24
A		NEW DRAWING	Shawn	2025.05.09
REV.	ECN NO	REVISION RECORD	DRAW	DATE

TOLERANCE		PART NO.	朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
X. ±0.5	X.XXX±0.15	2022WR-XP-XX-XX-XX-XX-HF		
X.X ±0.35		PCK-2022WR-XP-XX-XX-XX-XX-HF	TITLE. 2.0mm PITCH RIGHT ANGLE TYPE	
X.XX ±0.25	Angular ±5°	C-2022WR-XP-XX-XX-XX-XX-HF		
UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY
DWG TYPE.		Angus Chen	Sun.lee	Angel.tong
Customer Drawing		2025.10.24	2025.10.24	2025.10.24
		PAGE		REV.
		3 OF 3		A1
		SCALE		
		2: 1		