


RoHS HF

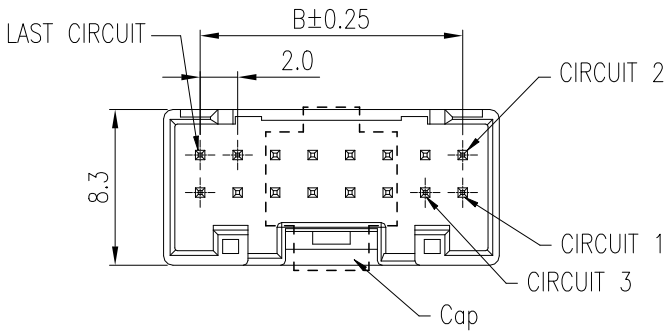

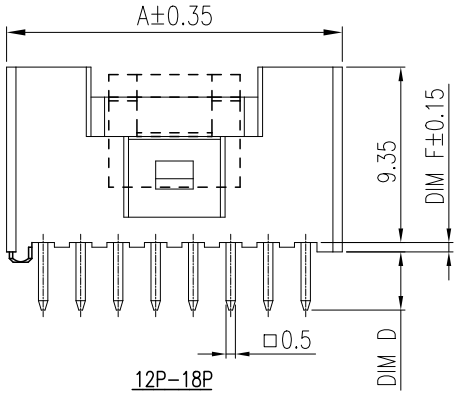

12P-18P



W/O BOSS


NOTES:
1. MATERIAL:
   1.1 INSULATOR: NYLON 66, UL 94V-0
   1.2 CONTACT: 0.50mm COPPER ALLOY
2. FINISH:
   TIN OR GOLD PLATING OVER 50u" NICKEL PLATED
3. RoHS & HALOGEN-FREE COMPLIANCE
4. THE PRODUCT IS SUITABLE FOR THE WAVE SOLDERING PROCESS
5. FOR FINISH, COLOR, AVAILABILITY, DELIVERY & MOQ, CONTACT CKM
6. BILL OF PART NO:

2022WV-XP-XX-XX-XX-XX-HF


- POS: 8~40
- FINISH:
  A=100u" MATTE TIN PLATING (OVERALL)
  B=100u" BRIGHT TIN PLATED (OVERALL)
  C=0.4u" GOLD FLASH PLATED (OVERALL)
- COLOR: BLANK=NATURAL
  OR A=BLACK
- SIDE STAND OFF (DIM F)
  BLANK=0.25 MM & W/ BOSS
  NB=0.25 MM & W/O BOSS
  01=0.50 MM & W/O BOSS
- SOLDER PIN LENGTH (DIM D)
  BLANK=3.10 MM (ONLY FOR 0.25 STAND OFF)
  2.4=2.40 MM
  2.6=2.60 MM (ONLY FOR 0.50 STAND OFF)
- PP=TRAY PACKAGE (W/O CAP)
  RP=TAPE & REEL PACKAGE (W/CAP)

CKM 2024.07.30 研發部


POS	A	B
8	9.9	6.0
10	11.9	8.0
12	13.9	10.0
14	15.9	12.0
16	17.9	14.0
18	19.9	16.0
20	21.9	18.0
22	23.9	20.0
24	25.9	22.0
26	27.9	24.0
28	29.9	26.0
30	31.9	28.0
32	33.9	30.0
34	35.9	32.0
36	37.9	34.0
38	39.9	36.0
40	41.9	38.0

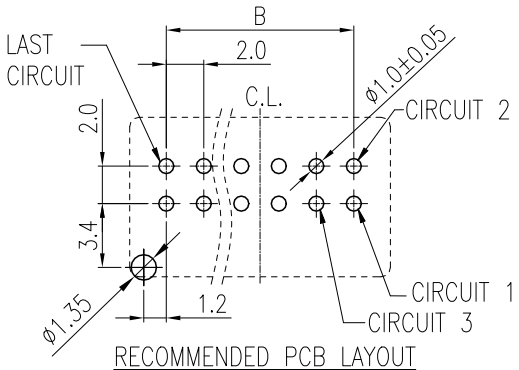


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE:±0.05
with boss

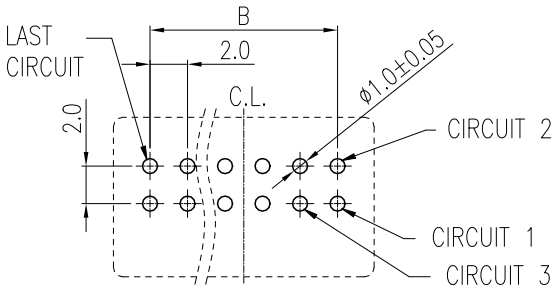

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE:±0.05
without boss



8P-10P





20P-40P

REV.	ECN NO	REVISON RECORD	DRAW	DATE
A		NEW DRAWING	Shawn	2024.07.23


TOLERANCE	PART NO. 2022WV-XP-XX-XX-XX-XX-HF	朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.		
X. ±0.50 X.XXX ±0.10 X.X ±0.35 X.XX ±0.25 Angular ±2°	DRAWING NO. C-2022WV-XP-XX-XX-XX-XX-HF	DESCRIPTION 2.0mm PITCH VERTICAL DIP TYPE CONNECTOR		
UNIT: mm	APPROVED BY Angus Chen 2024.07.23	CHECKED BY Lance Cheng 2024.07.23	DRAWN BY Shawn Hsiung 2024.07.23	PAGE 1 OF 3 SCALE 2.5 : 1
DWG TYPE. Customer Drawing				REV. A


RoHS HF

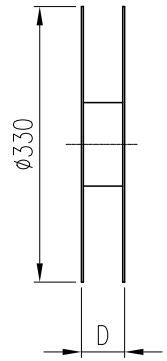


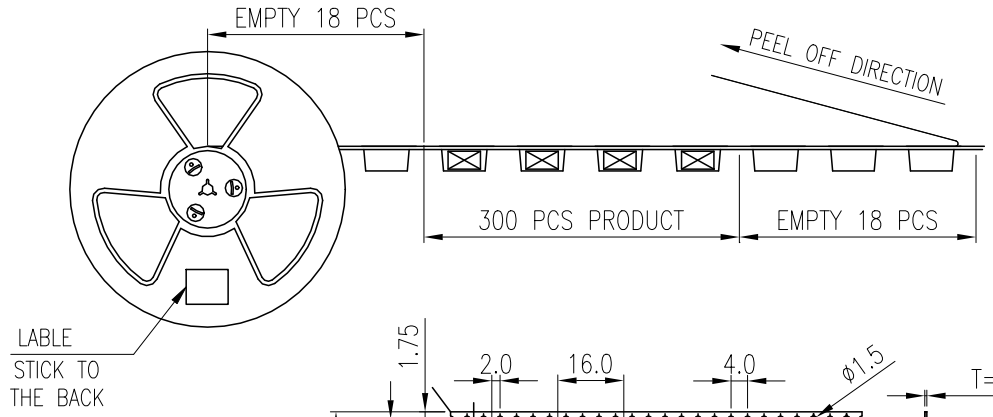



CKM
2024.07.30
研發部



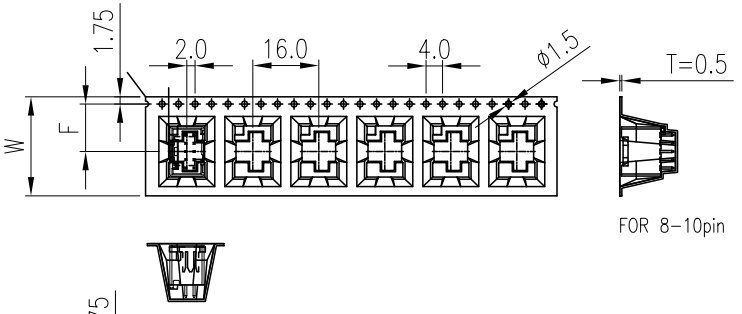

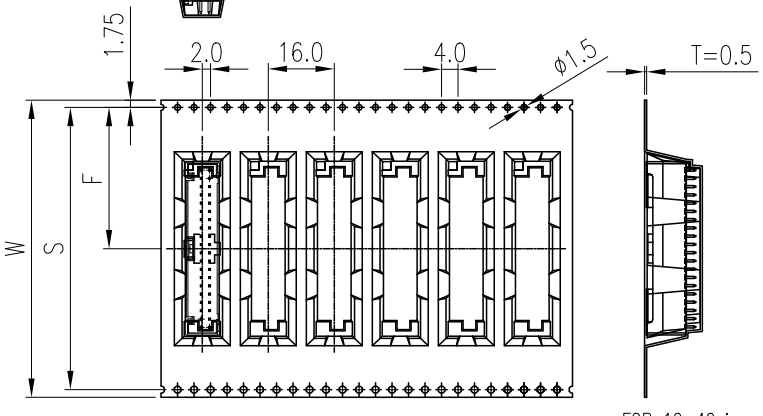

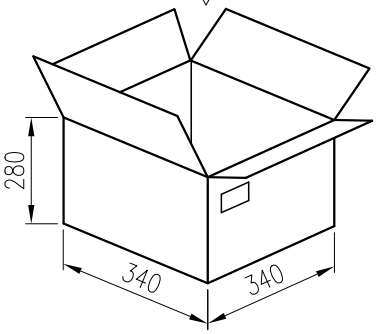



POS	W	S	F	D	PCS/REEL	PCS/CARTON
8	24.0		11.5	30.0	300	2400
10						
12	32.0	28.4	14.2	38.0		1800
14						
16	44.0	40.4	20.2	50.0		1500
18						
20						
22						
24						
26						
28	56.0	52.4	26.2	62.0		1200
30						
32						
34						
36						
38						
40						


REV.	ECN NO	REVISON RECORD	DRAW	DATE
A		NEW DRAWING	Shawn	2024.07.23


TOLERANCE	PART NO.	朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.
X. ±0.50 X.XXX ±0.10 X.X ±0.35 X.XX ±0.25 Angular ±2°	2022WV-XP-XX-XX-XX-XX-HF	
UNIT: mm	DRAWING NO. C-2022WV-XP-XX-XX-XX-XX-HF	DESCRIPTION 2.0mm PITCH VERTICAL DIP TYPE CONNECTOR


DWG TYPE.	APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
Customer Drawing	Angus Chen 2024.07.23	Lance Cheng 2024.07.23	Shawn Hsiung 2024.07.23	3 OF 3	A
				SCALE 2.5 : 1	

RoHS HF


CKM
2024.07.30
研發部



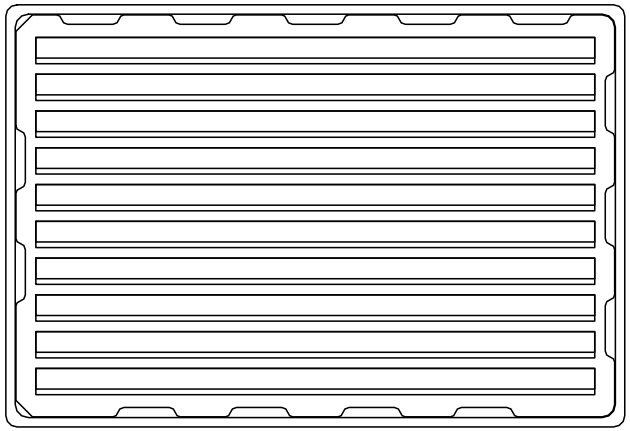

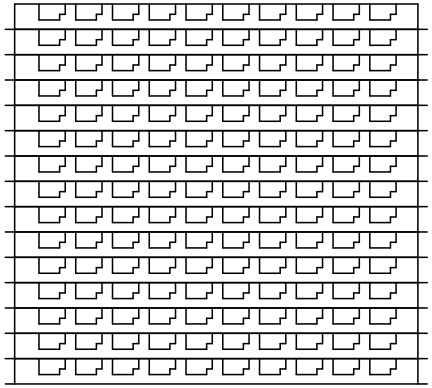

POS	PCS/TRAY	PCS/CARTON
8	300	9000
10	250	7500
12	210	6300
14	180	5400
16	160	4800
18	140	4200
20	130	3900
22	120	3600
24	110	3300
26	100	3000
28	90	2700
30	90	2700
32	80	2400
34	80	2400
36	70	2100
38	70	2100
40	70	2100

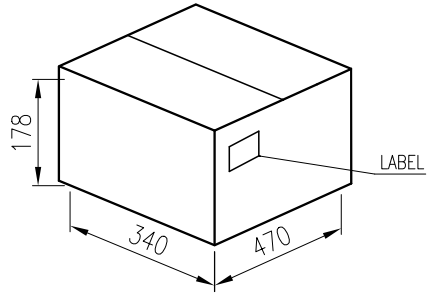

REV.	ECN NO	REVISON RECORD	DRAW	DATE
A		NEW DRAWING	Shawn	2024.07.23

TOLERANCE
X. ±0.50 X.XXX ±0.10
X.X ±0.35
X.XX ±0.25 Angular ±2°
UNIT: mm
DWG TYPE. Customer Drawing

PART NO. 2022WV-XP-XX-XX-XX-XX-HF
DRAWING NO. C-2022WV-XP-XX-XX-XX-XX-HF

朝貴電子股份有限公司
CKM ELECTRONICS CO., LTD.

DESCRIPTION 2.0mm PITCH VERTICAL DIP TYPE CONNECTOR

APPROVED BY	CHECKED BY	DRAWN BY	PAGE	REV.
Angus Chen 2024.07.23	Lance Cheng 2024.07.23	Shawn Hsiung 2024.07.23	2 OF 3	A
			SCALE 2.5 : 1	