

RoHS



CUST INFORMATION.

PART NO. NA	DRAWING NO. NA	REV. NA
----------------	-------------------	------------

NOTE:

1.MATERIAL SPECIFICATION:

- 1.1 INSULATION: NYLON 66 UL94V-0
- 1.2 CONTACT:  $\phi 0.70\text{mm}$  COPPER ALLOY

2.FINISH: TIN PLATED

3.BILL OF PART NO:






2503WR-XP-XX-XXX-XX

- NO. OF CIRCUITS: 2~18
- FINISH:
  - A=MATTE TIN PLATED
  - B=BRIGHT TIN PLATED
  - C=GOLD PLATED
- BLANK OR HF (HALOGEN FREE)
- VOID CIRCUITS: BLANK(STANDARD) OR 1~3 ALPHANUMERIC DIGITS
- COLOR: BLANK=NATURAL M=MILKY YELLOW

- 4. FOR COLOR, AVAILABILITY, DELIVERY & MOQ, CONTACT CKM
- 5. DIMENSIONAL & ORDERING INFORMATION

POS	A	B	C
2	2.5	7.5	5.9
3	5.0	10.0	8.4
4	7.5	12.5	10.9
5	10.0	15.0	13.4
6	12.5	17.5	15.9
7	15.0	20.0	18.4
8	17.5	25.5	20.9
9	20.0	25.0	23.4
10	25.5	27.5	25.9
11	25.0	30.0	28.4
12	27.5	32.5	30.9
13	30.0	35.0	33.4
14	32.5	37.5	35.9
15	35.0	40.0	38.4
16	37.5	42.5	40.9
17	40.0	45.0	43.4
18	42.5	47.5	45.9

COLOR CODE	
BLANK	NATURAL
A	BLACK
B	BROWN
C	RED
D	ORANGE
E	YELLOW
F	GREEN
G	BLUE
H	PURPLE
J	GREY
K	WHITE
M	MILKY YELLOW
Q	BRICK RED
U	MILKY WHITE

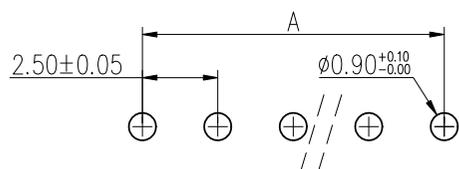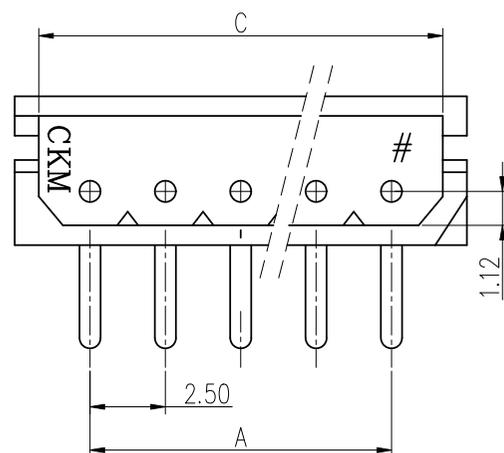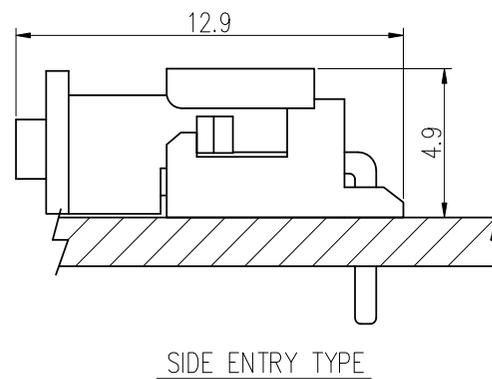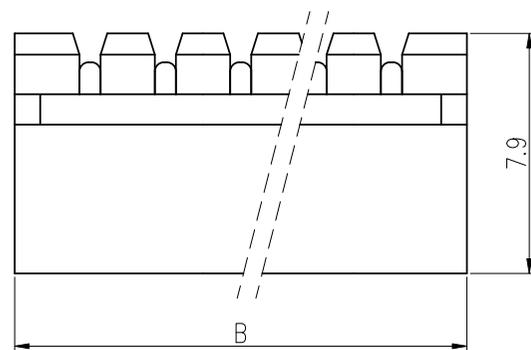

RECOMMENDED PCB LAYOUT  
PCB THK=1.6

TOLERANCE		PART NO.		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
X.	X.XXX ±0.10	2503WR-XP-XX			
X.X	±0.30	DRAWING NO.		TITLE.	
X.XX	±0.20	C-25030209-XX		?PIN2.5-WR	
UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY	PAGE
		Angus Chen 2017.01.17	Rock 2017.01.17	TZQ 2017.01.17	1 OF 2
DWG TYPE.		SCALE		REV.	
Customer Drawing		4 : 1		B	







B		UPDATE DRAWING	TZQ	2017.01.17
A		NEW RELEASE		2013.05.15
REV.	ECN NO	REVISION RECORD	DRAW	DATE

1  
RoHS

2  
HF

6  
CUST INFORMATION.

PART NO. NA	DRAWING NO. NA	REV. NA
----------------	-------------------	------------

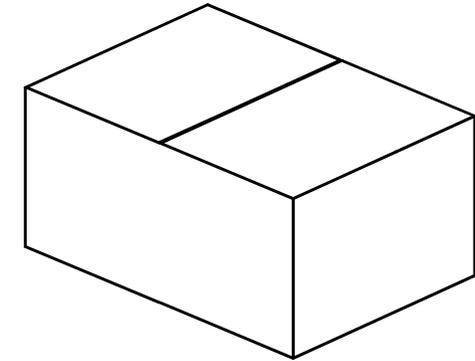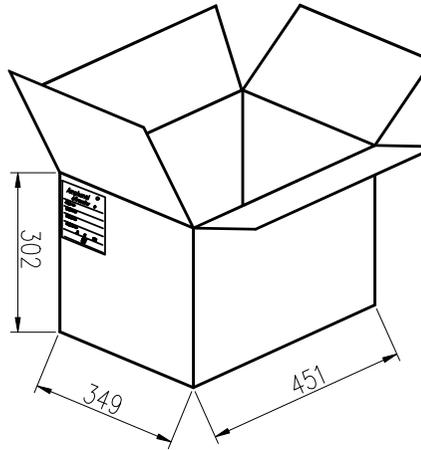

POS	PE BAG/PSC	CARTON/PCS	GROSS WEIGHT	NET WEIGHT	POS	PE BAG/PSC	CARTON/PCS	GROSS WEIGHT	NET WEIGHT
2	1000PCS	60000PCS	12.96Kg	14.3Kg	11	1000PCS	15000PCS	13.5Kg	14.84Kg
3	1000PCS	55000PCS	16.06Kg	17.4Kg	12	1000PCS	15000PCS	14.64Kg	15.98Kg
4	1000PCS	45000PCS	16.56Kg	17.9Kg	13	1000PCS	13000PCS	13.68Kg	15.02Kg
5	1000PCS	35000PCS	15.54Kg	16.88Kg	14	1000PCS	12000PCS	13.54Kg	14.88Kg
6	1000PCS	30000PCS	15.60Kg	16.94Kg	15	1000PCS	12000PCS	14.45Kg	15.79Kg
7	1000PCS	30000PCS	17.88Kg	19.22Kg	16	1000PCS	10000PCS	12.8Kg	14.14Kg
8	1000PCS	20000PCS	13.44Kg	14.78Kg	17	1000PCS	10000PCS	13.56Kg	14.90Kg
9	1000PCS	20000PCS	14.96Kg	16.3Kg	18	1000PCS	9000PCS	12.89Kg	14.23Kg
10	1000PCS	20000PCS	16.48Kg	17.82Kg					

CKM  
2017.01.19  
研發部

TOLERANCE		PART NO. 2503WR-XP-XX		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
X. X.X ±0.30 X.XX ±0.20	X.XXX ±0.10 Angular ±2°	DRAWING NO. C-25030209-XX		TITLE. CKM2503 SERIES	
UNIT: mm		APPROVED BY Angus Chen 2017.01.17	CHECKED BY Rock 2017.01.17	DRAWN BY TZQ 2017.01.17	PAGE 20F2
DWG TYPE. Customer Drawing				SCALE 1:1	REV. B

B		UPDATE DRAWING	TZQ	2017.01.17
A		NEW RELEASE		2013.05.15
REV.	ECN NO	REVISION RECORD	DRAW	DATE